










ULT5000 Sliding Doors
| Clear Anodize Finish with Wire Pull Handles

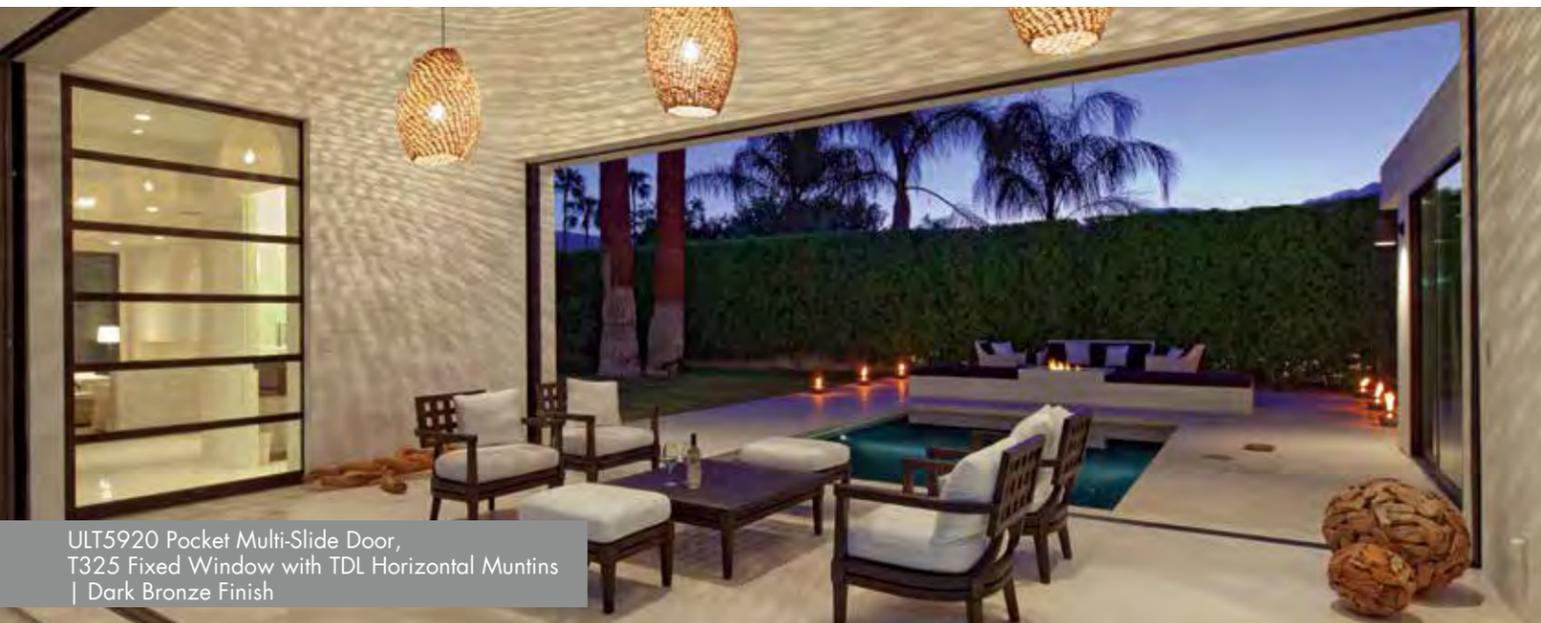

ULT5920 Pocket Multi-Slide Door,
T325 Fixed Window with TDL Horizontal Muntins
| Dark Bronze Finish

Sliding Doors, also referred to as Arcadia Doors, have earned a reputation as the most versatile and practical door type for access to decks and patios. They also score highly for delivering expansive views while remaining cost effective.

Arcadia Custom sliders offer security and strength with sleek profiles. Smooth and effortless sliding is achieved through high-performance rollers.

A range of configurations are available, from two-panel and three-panel sliders to multi-sliding and pocketing door systems.

Sliding Door

ULT5000

Featuring effortless operation, use Arcadia Custom Sliding Doors to keep the extreme temperatures and harsh elements of any season at bay while still bringing the beauty of external landscapes into the home. This sliding glass door system is available in **2, 3, or 4 door** configurations.



ULT5000 Sliding Door [OXXO]
| Clear Anodize Finish with Wire Pull Handle



ULT5000 [XO] shown with Futura Flush Handle and Futura Flush Thumbturn. Clear Anodize Finish. Hardware options see page 30.

Features

- Size** Individual door panel sizes up to **6'** wide, **10'** tall
- Thermally Broken** Door panels and frames for improved energy performance
- High Performance Glass** 1" dual-glazed, Low-E glass, NFRC certified with U-Values as low as .34; see NFRC Chart at arcadiacustom.com for glass specifications
- Frame Depth** **4¾"** standard, or **4"** without a screen
- Hardware** Flush pull with stainless steel mortise lock, 2" diameter marine-grade, stainless steel precision bearing rollers; optional 3" diameter roller available and recommended when door panel exceeds 50 sq. ft.
- Track** Marine-grade, non-corrosive stainless steel for optimum EZ-gliding performance



Options

- Floor Track Sills** Five options to choose from, based on application and performance requirements: **1½"**, **2"**, **2¾"**, **3"**, or a **5/8"** flush sill; optional subsill also available, see page 32
- Screens** 2½" x 1" aluminum sliding screen door, assembled with stainless steel components, available with a charcoal insect mesh or Invisivue screen mesh
- Jamb Type** Block Frame or Nail Fin
- High Load Interlock** This option is recommended on doors over 8' tall, or exceeding 50 sq. ft., for additional wind load requirements and increased structural integrity; see page 99 for detail
- TDL/SDL Lite Grid** See page 96 for details on true-divided-lite/simulated-divided-lite grid options

Configurations

XO, OOX, OXO, OXXO, XOOX

Additional fixed panels can be connected to each other on the same fixed door track, allowing for the assembly of huge glass wall systems, all in a two-track system.

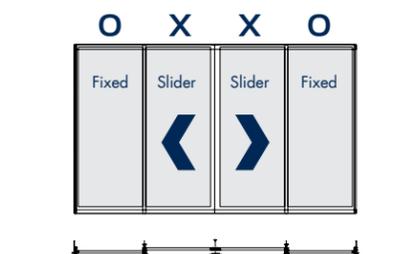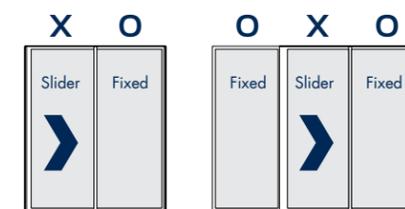

For more configurations visit arcadiacustom.com